


GRANOSICHTER

Pre-Cleaning /Cleaning Separator

It carries out the pre-cleaning and cleaning of grains, guaranteeing an intensive separation from impurities such as blades of straw and vetches, even for large hourly productions. The machine is composed of a central oscillating body which contains aluminum frame groups pneumatically fixed with a sifting surface of 24 sq. m. The structure includes a decantation group at the inlet and a suction channel at the outlet.

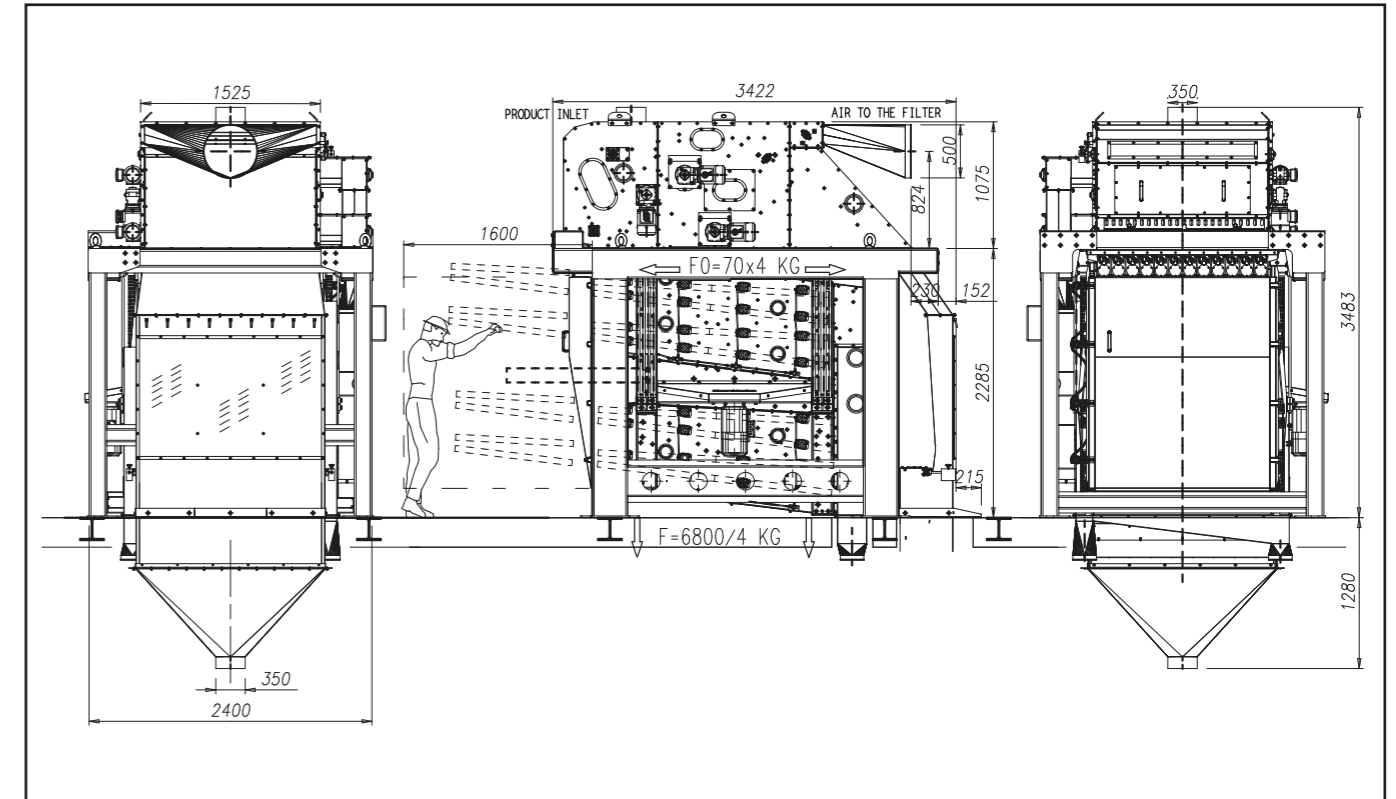

Model	Mq	* Capacity t/h silos	Aspiration m ³ /m	Main drive motor	Motor Closed circuit aspirator	Gear motor	Weight Kg
GS 24/150	24	200	200	Kw 4	Kw 2x0,55	3 x 0,55 Kw	6500

* Soft wheat 0,75t/m³
Units = mm