


PSV

Vertical debranner

The main function of the PSV is to carry out a reduction in bacterial load and heavy metals, thanks to a series of rotating grinding wheels and metallic perforated mesh. The remaining scrapes are then sieved. The decortication intensity can be regulated inside the machine with four contrast bars. In order to maintain constant the decortication pressure, the unloading distributor inside the machine is equipped with an electrical control cylinder, which is regulated based on the engine absorptive capacity.

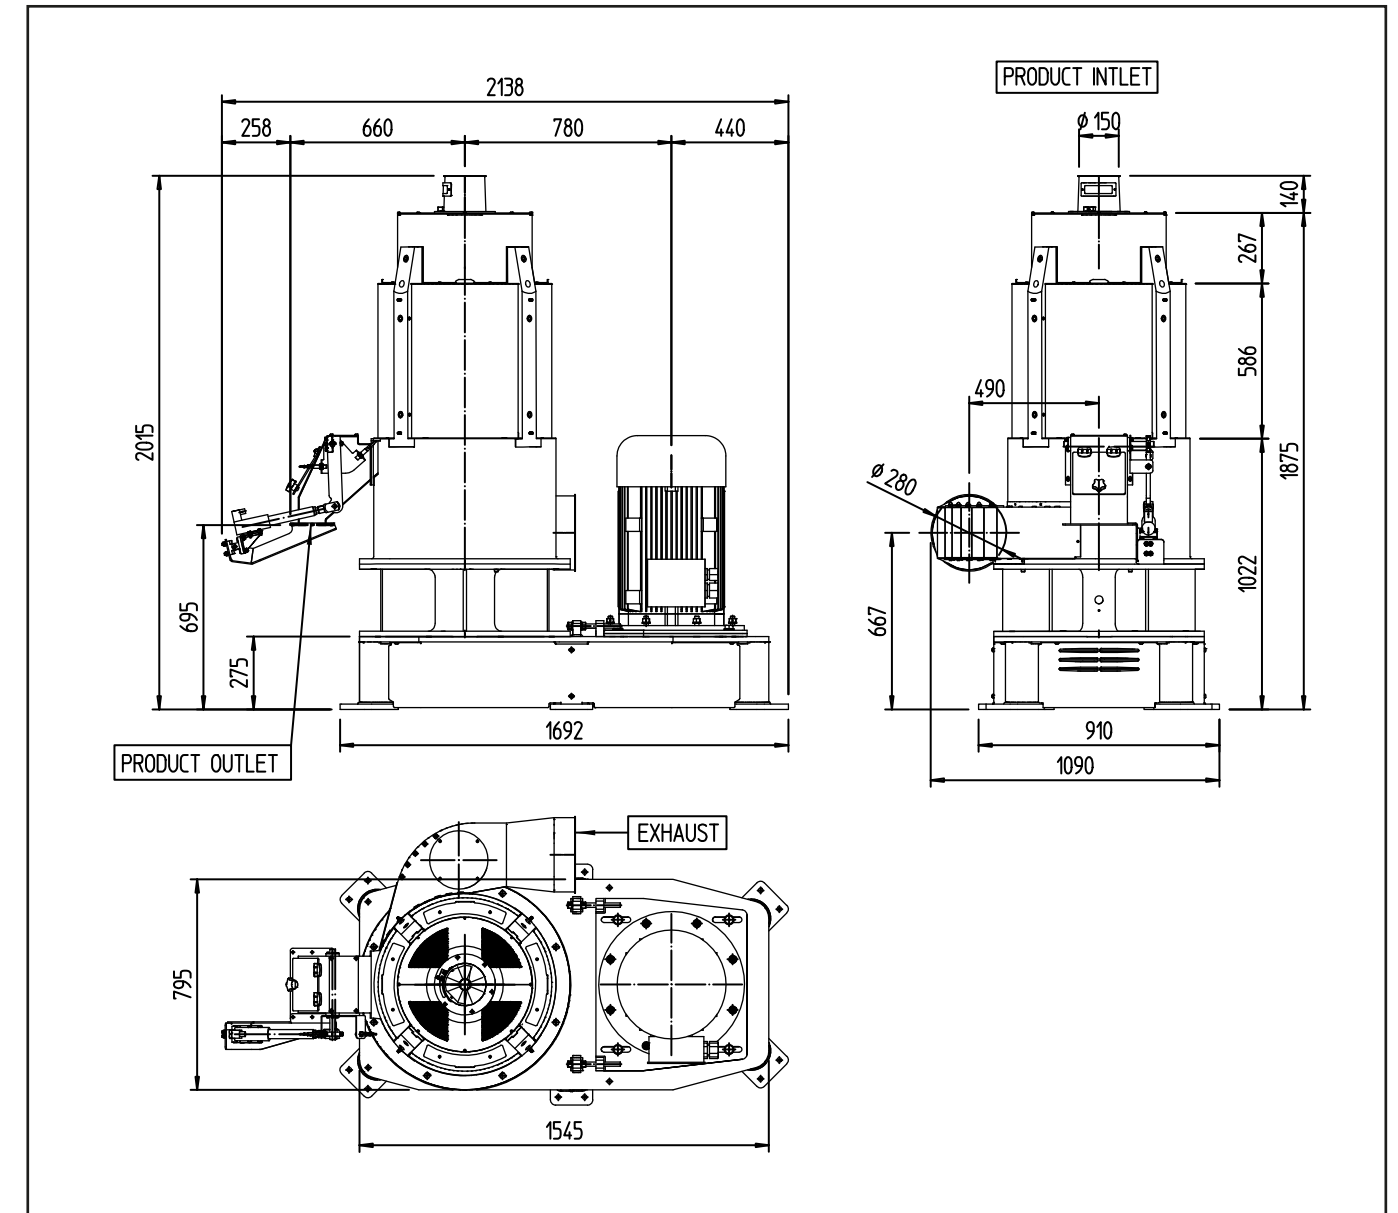

PSV-A	*Capacity t/h	Power kW	Air Volume m ³ /min	Suction Pressure mmH ₂ O	Weight Kg	Packing m ³
Soft wheat	5/10	55-75	60	160	2250	4.7
Durum Wheat	5/8	55-75				
Rice	6	55-75				

* Soft wheat 0,75t/m³
Units = mm