


SPR

Pre-cleaning Separator

Machine used for the pre-cleaning of cereals, separating them from coarse impurities, such as: paper, board, stones, iron pieces, etc. This process is carried out by a wire mesh cylinder with a special screw on the inside, which rotates by means of a gearmotor. Thanks to its design it reduces wear on the subsequent machines in the production process.

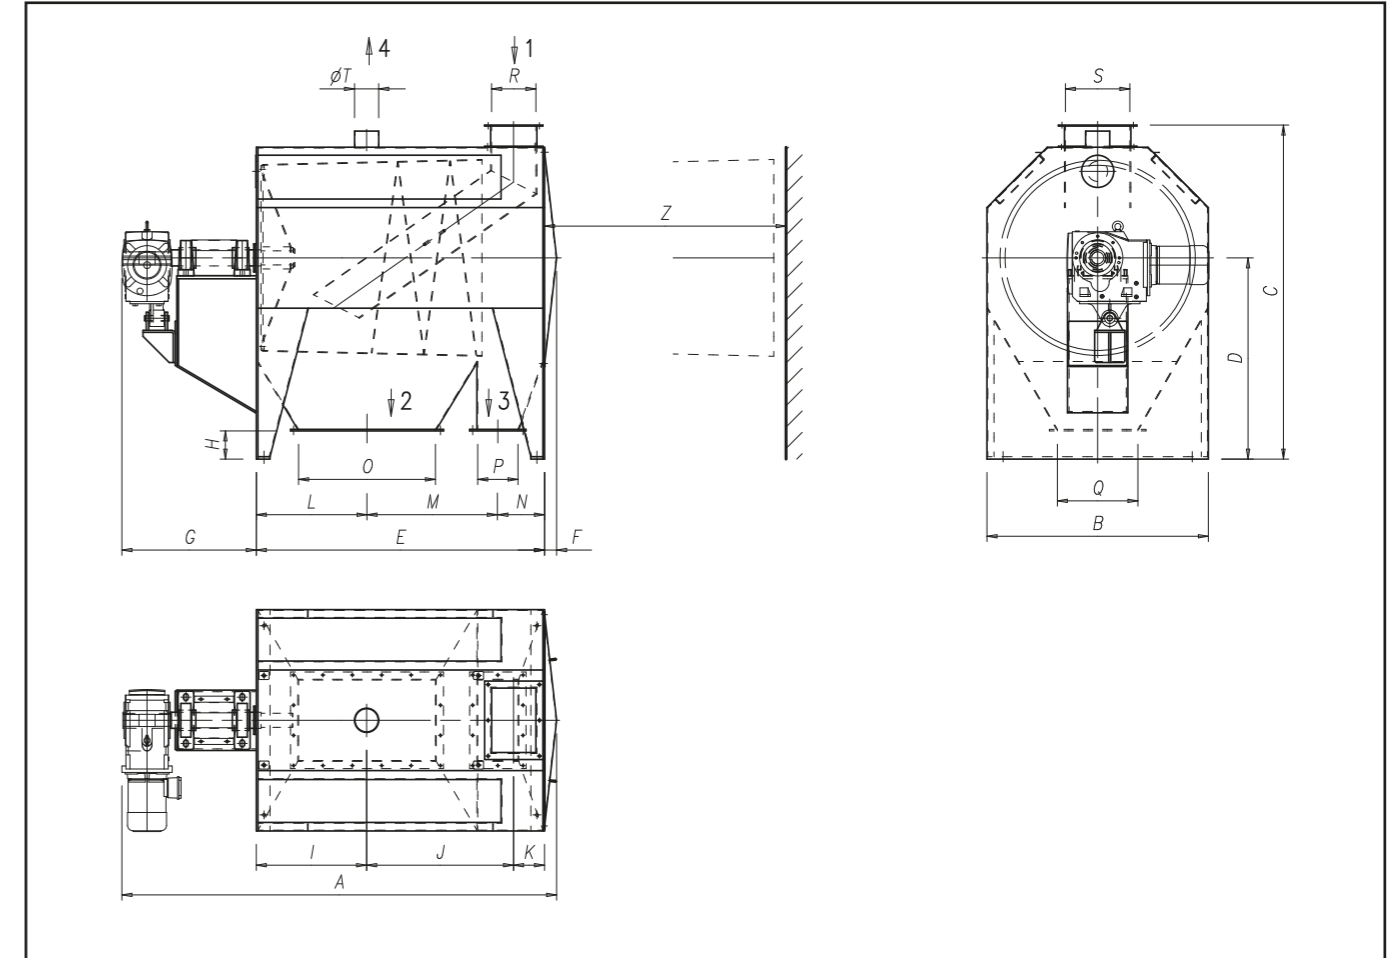

- ① Product Entry
- ② Product Exit
- ③ Impurity Discharge
- ④ Suction

| Model | Frame | A | B | C | D | E | F | G | H | I | J | K | L | M |
|---------|------------|------|------|------|------|------|-----|-----|-----|------|------|-----|------|------|
| SPR 200 | ø970x1090 | 2130 | 1100 | 1660 | 1000 | 1430 | 60 | 640 | 140 | 548 | 730 | 152 | 550 | 650 |
| SPR 400 | ø1230x1390 | 2520 | 1380 | 1825 | 1050 | 1810 | 70 | 640 | 50 | 730 | 880 | 200 | 705 | 830 |
| SPR 600 | ø1650x2090 | 3580 | 1800 | 2150 | 1150 | 2710 | 100 | 770 | 50 | 1070 | 1350 | 290 | 1050 | 1260 |

| Model | N | O | P | Q | R | S | T | Z | Air m ³ /1" | Motor Kw | *Capacity T/h | Weight |
|---------|-----|------|-----|-----|-----|-----|-----|------|------------------------|----------|---------------|--------|
| SPR 200 | 230 | 680 | 200 | 400 | 220 | 320 | 150 | 1200 | 12 | 0.75 | 200 | 850 |
| SPR 400 | 275 | 900 | 250 | 400 | 320 | 460 | 200 | 1500 | 15 | 1.1 | 400 | 1300 |
| SPR 600 | 400 | 1700 | 350 | 700 | 500 | 500 | 200 | 2200 | 20 | 3 | 600 | 2100 |

* Soft wheat 0,75t/m³
Units = mm